

MAGNETIC DOL STARTERS

KD-1L series magnetic starter is mainly applied to circuit of AC 50 or 60Hz, Voltage up to 550V for far distance making and breaking circuit and frequently starting and controlling motor. It has the features fo small volume, light weight, low power consumption, efficiency, safe and reliable performance etc.


TYPE & MEANING

KD-1L ■


— CURRENT RATING
— DESIGN CODE
— MAGNETIC STARTERS




SELECTION TABLE			
TYPE	RATED CURRENT (A)	MAX. POWER (Kw) 415V,3PH AC MOTOR (AC3 DUTY)	RELAY RANGE AMPS
KD-1L9	9	4	7-10
KD-1L12	12	5.5	10-13
KD-1L18	18	9	13-18
KD-1L25	25	11	18-25
KD-1L32	32	15	23-32
KD-1L40	40	22	30-40
KD-1L50	50	25	38-50
KD-1L65	65	37	57-66
KD-1L80	80	45	66-80
KD-1L95	95	45	80-95

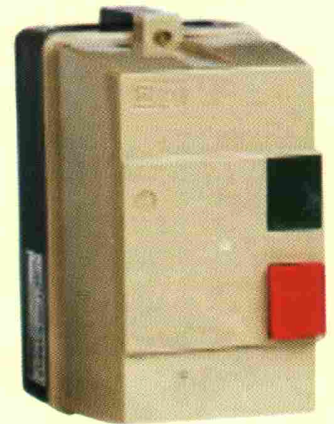


KD-1L. (40 / 95)

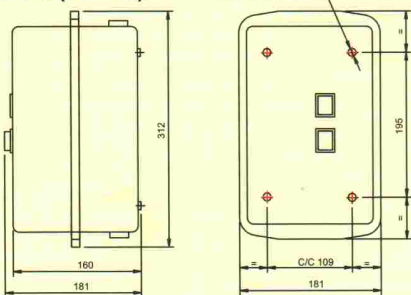

KD-1L. (25/32)

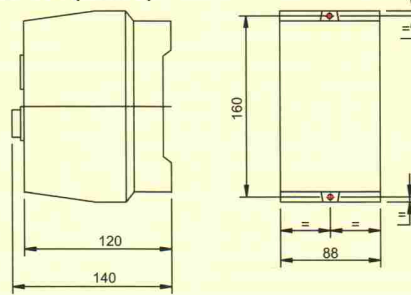

KD-1L. (9/12/18)

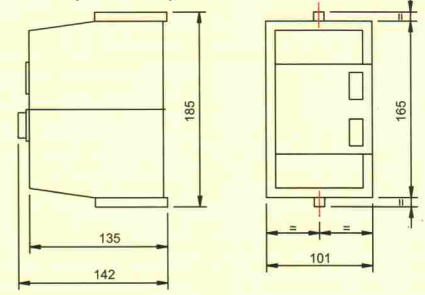

ELECTRONIC & POWER CONTROL CO.

(AN ENTERPRISE OF KAKKU E & P CONTROL (P) LTD.)

1, INDUSTRIAL ESTATE, BHILAI, C.G.-490026

PH.:91-788-2382297, 2382610, 2286494, 2286495

FAX : 91-788-2381797, e-mail:kakku_bhilai@yahoo.com