


All dimensions are in m.m.

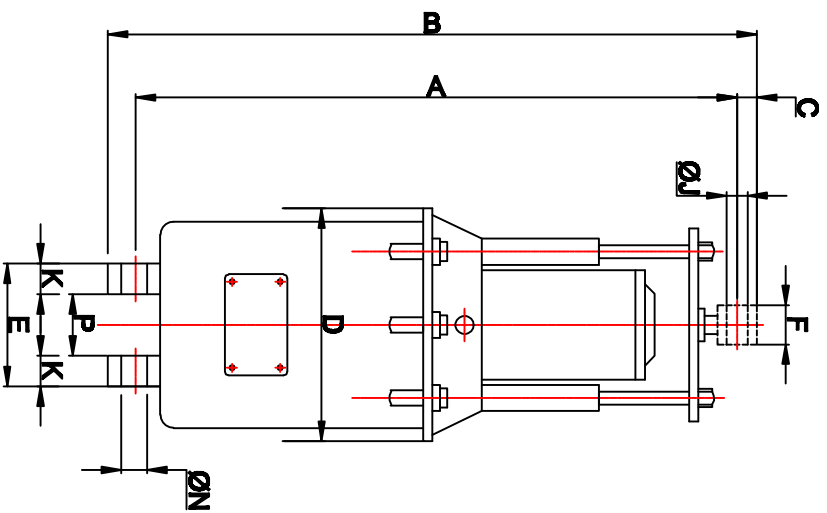

- TECHNICAL DATA :-**
- 1. POWER SUPPLY : 415V AC, 3 ph., 50 Hz.
 - 2. CLASS OF INSULATION : CLASS 'F'
 - 3. RECOMMENDED OIL : AS PER IS 335/1972 (TRANSFORMER OIL)
 - 4. DEGREE OF PROTECTION : IP 65

DIMENSIONS

SL.NO.	YOUR MODEL	OUR MODEL	THRUST	STROKE	A	B	C	D	E	F	TIME		J	K	N	P
											RISE	DECLINE				
1.	EHT - 45-50	K90 450	45	50	555	805	50	210	120	40	0.8	0.5	20	30	25	80
2.	EHT - 45-75	K90 475	45	75	555	630	75	210	120	40	0.8	0.5	20	30	25	80
3.	EHT - 75-50	K90 750	75	50	555	805	50	210	120	40	0.8	0.5	20	30	25	80
4.	EHT - 75-120	K90 7120	75	120	555	675	120	210	120	40	0.8	0.5	20	30	25	80
5.	EHT - 185-80	K18 1858	185	80	785	825	80	254	170	50	1	0.6	25	42.5	30	85
6.	EHT - 185-180	K18 18180	185	180	785	925	180	254	170	50	1	0.6	25	42.5	30	85

CUSTOMER : M/S SAIL RSP



ELECTRONIC & POWER CONTROL CO.

BHILLAL-490026

**GENERAL ARRANGEMENT DRAWING
FOR THRUSTER BRAKE
SERIES - K**

NAME SIGN

SHWETA

M.BAHADUR

M.BAHADUR

DRG. NO. : EPCC/K/RSP/Z01001

TOTAL NO. OF SHEETS 1

Scale: N.T.S.

Sheet: 1 of 1

REV.

DATE

23-10-2010

Scale: N.T.S.

Sheet: 1 of 1